

Certificate Of Conformity to EN14960:2019

This certificate relates only to the individual product detailed below. It confirms that at the time of manufacture this product conforms to EN14960. To remain compliant this product must be tested annually.

To book your test please call +44 (0)1179 414 918 or visit www.airquee.com for more information.

Product: Farm Multiplay Activity Centre
Serial No: AQS44469
Code: AQ7088
Valid From: 29-04-2021
Certificate No: AQS44469
Tag No: N/A
Weight: Unit: 133kg Total: 151kg

| Product Dimensions (m) | | | |
|------------------------|------|-----|-----|
| H | W | L | |
| 4.4 | 5.65 | 5.5 | |
| User Height (m) | | | |
| 1 | 1.25 | 1.5 | 1.8 |
| Number of Users | | | |
| 7 | 5 | 4 | 4 |

| Structure | Pass | Fail | N/A |
|-------------------------------------------------|------|------|-----|
| 1 Security Of Seams | X | | |
| 2 Stitching | X | | |
| 3 Anchor Points | X | | |
| 4 Anchor Accessories | X | | |
| 5 Walls & Towers | X | | |
| 6 Blower Tube(s) / Valve(s) | X | | |
| 7 Zip(s) | X | | |
| 8 Fabric Flame Retardant | X | | |
| 9 Fabric Strength | X | | |
| 10 Step / Ramp Size | X | | |
| 11 Grounding | X | | |
| 12 Sharp Angles | X | | |
| 13 Stability | X | | |
| 14 Ropes | | | X |
| 15 Artwork | X | | |
| 16 Air Loss Points | X | | |
| 17 Water Gauge Pressure (WGP) / Pressure (mbar) | X | | |
| 18 Fall Off Height (FOH) | X | | |
| 19 Trough Depth | X | | |
| 20 Thread | X | | |
| 21 Netting | X | | |
| 22 Entrapment | X | | |
| 23 Deflation / Evacuation Time | X | | |
| 24 Windows | X | | |
| 25 Markings | X | | |
| 26 Identification | X | | |
| Totally Enclosed Structures | | | |
| 27 Exits | | | X |
| 28 Exit Markings | | | X |
| 29 Lighting Supports | | | X |
| 30 Emergency Lighting | | | X |
| 31 Deflation Speed | | | X |
| 32 User Area Pressure | | | X |
| Slides | | | |
| 33 Wall Height / Platform Height | X | | |
| 34 Run-Out | X | | |
| 35 Clamber Step | X | | |
| 36 Slide Sheet | X | | |
| Blower | | | |
| 37 Size & Type | X | | |
| 38 Inlet & Outlet Mesh | X | | |
| 39 Cable & Plug | X | | |
| 40 Casing & Impeller | X | | |
| 41 Pat Test | | | X |
| 42 Return Flap | X | | |

| Notes | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Material : gloss 630g pvc + gloss 450g pvc | |
| Anchor points: 9 pcs PVC & metal triangle Bottom Supplied anchor accessories: 9 pcs / 400 mm* 18 mm metal pegs Inside wall height: 2.00 m Blower tube length: 1.47 m Position: 1 pcs rear side Zips: 2 pcs (exterior velcro flap + interior non return flap) | |
| Platform height : 0.61 m Step depth : 1.38 m | |
| Artwork : print and paint (laminated, UV resistant) | |
| WGP: 4.8 inch /11.96 mbar FOH: 0.52 m | |
| Netting: black scrim fixed Roof : black scrim fixed | |

| Notes | |
|-------|--|
| | |

| Notes | |
|-----------------------------------------------------------------------------------------------------------------------|--|
| Platform height: 1.65 m Run out: 2.25 m Width of slide: 1.2 m Slide sheet: bright green sliding material PVC | |



| Notes | |
|---------------------------|--|
| Blower power: 1 pcs 1.5HP | |

SIGNED BY: Oláh Etele Tibor
 RPII ANNUAL INFLATABLE INSPECTOR



Date of test: 23-04-2021

Airquee Ltd
 Duel House
 Llandowlais Street
 Cwmbran
 NP44 7XB, UK
Tel: +44 (0)1179 414 918
Email: sales@airquee.co.uk

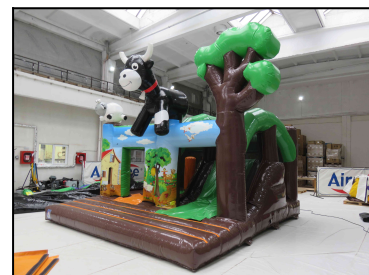

To remain compliant this product must be tested annually.